




## Cetop 5 Manifold Block

### Features:

- Cast Iron Construction – Phosphated
- 300 Bar maximum working pressure
- 70 L/Min maximum Flow Rate
- P Port – 3/4" BSP; T Port – 1" BSP; A and B Ports – 1/2" BSP

### Benefits:

- Reduced fitting and installation costs
- Compact design of valve circuits
- Reduces leak paths
- Allows for easy modification to valve assembly stacks

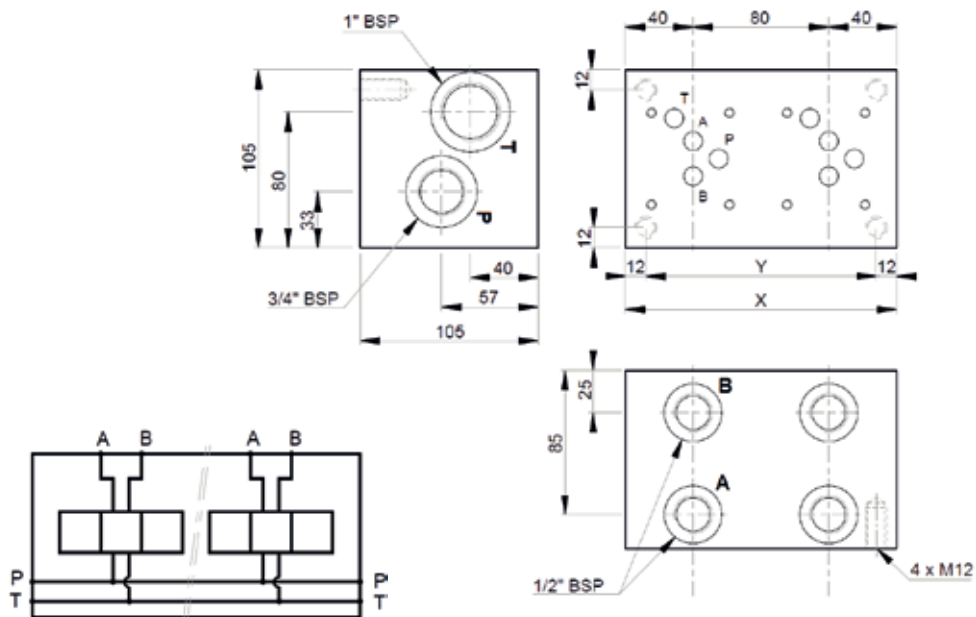

Primary Item No	Part No	No. of Stations	X mm	Y mm	Weight kg
5016396HA	MR5-1G	1	80	56	5.8
5016398HA	MR5-2G	2	160	136	11.3
5016400HA	MR5-3G	3	240	216	17.0
5055636HA	MR5-4G	4	320	296	22.7
5016404HA	MR5-5G	5	400	376	28.5
5016406HA	MR5-6G	6	480	456	34.2