


## Female Outlet Tee (Metric)

### Benefits

- Leak free “O” ring seal.
- Safe joint every time – low tightening torque and clamping forces rise with the internal pressure.
- Low installed cost – no welding (so inert gas purging, NDT and excessive flushing are not required), minimal tube preparation and no special assembly equipment are required.
- Demountable and reusable. Can be used with most tube materials.

### Features

1. Body – mild steel, compatible with most fluids and environments. Locates O-ring and tube.
2. O-ring – nitrile, compatible with most fluids, highly resistant to leakage even under severe vibration, pressure pulsation and temperature cycling. Provides diametric seal between the O/D and body cavity.
3. Nut - mild steel, compatible with environments. Closes split collet and retains sealing mechanism.
4. Back-up washer – mild steel. Provides additional support for the tube and locates the O-ring.
5. Split collet – mild steel. Clamping force rises with pressure. Large clamping area ensures minimal deformation of the tube. Retains tube in position.

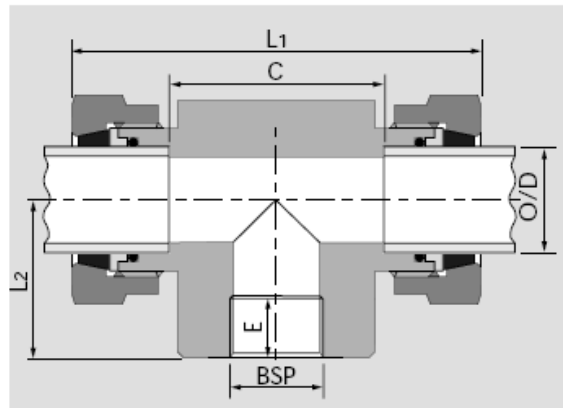

Primary Item No	O/D mm	Stud BSP	Part No	L1 mm	L2 mm	C mm	E mm	Nut A/F mm	Body A/F mm	Max WP Bar
5011880	6	1/4	KRAM6-4FOTR	63	21	33	11	16	22	680
5011939	8	1/4	KRAM8-4FOTR	63	21	33	11	17	22	680
5011440	10	3/8	KRAM10-6FOTR	73	25	29	13	27	27	680
5011509	12	3/8	KRAM12-6FOTR	73	25	29	13	27	27	680
5011592	16	1/2	KRAM16-8FOTR	79	30	33	16	32	30	680
5011647	20	3/4	KRAM20-12FOTR	103	37	43	19	41	38	680
5011717	25	1	KRAM25-16FOTR	116	42	56	21	46	48	500
5011773	30	1-1/4	KRAM30-20FOTR	134	45	68	21	50	51	500
5011811	38	1-1/4	KRAM38-20FOTR	144	48	68	21	60	54	500
5011820	38	1-1/2	KRAM38-24FOTR	149	53	73	25	60	60	500

### Supplied By

Primary Fluid Power Limited  
Caddick Road  
Knowsley Business Park  
L34 9HP  
Tel No. +44(0)151 632 9500  
Fax No. +44(0)151 548 9896  
[www.PrimaryFP.co.uk](http://www.PrimaryFP.co.uk)