


Equal Tee (Imperial)

Benefits

- Leak free “O” ring seal.
- Safe joint every time – low tightening torque and clamping forces rise with the internal pressure.
- Low installed cost – no welding (so inert gas purging, NDT and excessive flushing are not required), minimal tube preparation and no special assembly equipment are required.
- Demountable and reusable. Can be used with most tube materials.

Features

1. Body – mild steel, compatible with most fluids and environments. Locates O-ring and tube.
2. O-ring – nitrile, compatible with most fluids, highly resistant to leakage even under severe vibration, pressure pulsation and temperature cycling. Provides diametric seal between the O/D and body cavity.
3. Nut - mild steel, compatible with environments. Closes split collet and retains sealing mechanism.
4. Back-up washer – mild steel. Provides additional support for the tube and locates the O-ring.
5. Split collet – mild steel. Clamping force rises with pressure. Large clamping area ensures minimal deformation of the tube. Retains tube in position.

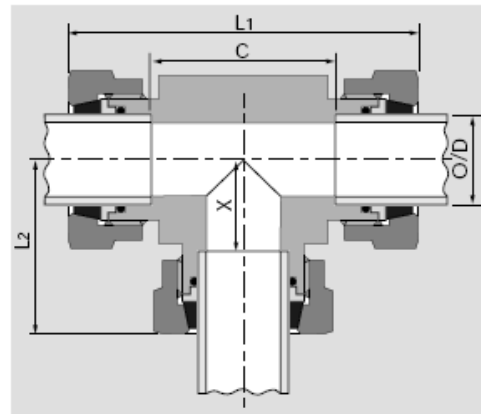

Primary Item No	O/D	Part No	C mm	L1 mm	L2 mm	X mm	Nut A/F mm	Body A/F mm	Max WP Bar
5012325	1/4"	KRA4TR	24	54	27	12	16	16	680
5011968	5/16"	KRA5TR	27	57	29	14	17	19	680
5012432	3/8"	KRA6TR	27	57	29	14	19	19	680
5012499	1/2"	KRA8TR	27	71	35	14	27	27	680
5011619	5/8"	KRA10TR	33	80	40	17	32	30	680
5012037	3/4"	KRA12TR	38	89	45	19	33	32	680
5011698	7/8"	KRA14TR	43	103	51	21	41	38	680
5012163	1"	KRA16TR	44	104	53	22	46	41	500
5012203	1-1/4"	KRA20TR	59	125	62	29	50	48	500
5011832	1-1/2"	KRA24TR	71	147	74	36	60	54	500
5012274	2"	KRA32TR	98	198	99	49	80	76	500

Supplied By

Primary Fluid Power Limited
Caddick Road
Knowsley Business Park
L34 9HP
Tel No. +44(0)151 632 9500
Fax No. +44(0)151 548 9896
www.PrimaryFP.co.uk