


Equal Elbow (Imperial)

Benefits

- Leak free “O” ring seal.
- Safe joint every time – low tightening torque and clamping forces rise with the internal pressure.
- Low installed cost – no welding (so inert gas purging, NDT and excessive flushing are not required), minimal tube preparation and no special assembly equipment are required.
- Demountable and reusable. Can be used with most tube materials.

Features

1. Body – mild steel, compatible with most fluids and environments. Locates O-ring and tube.
2. O-ring – nitrile, compatible with most fluids, highly resistant to leakage even under severe vibration, pressure pulsation and temperature cycling. Provides diametric seal between the O/D and body cavity.
3. Nut - mild steel, compatible with environments. Closes split collet and retains sealing mechanism.
4. Back-up washer – mild steel. Provides additional support for the tube and locates the O-ring.
5. Split collet – mild steel. Clamping force rises with pressure. Large clamping area ensures minimal deformation of the tube. Retains tube in position.

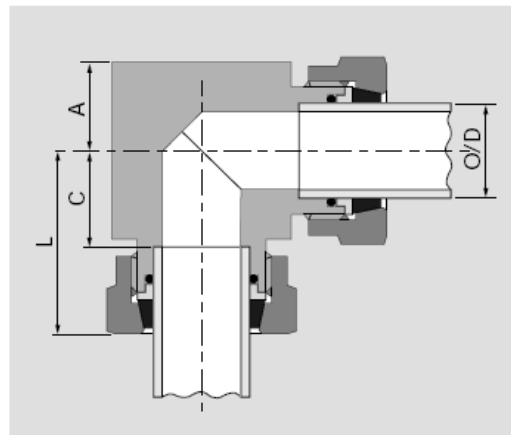

Primary Item No	O/D mm	Part No	A mm	C mm	L mm	Nut A/F mm	Body A/F mm	Max WP Bar
5012322	1/4"	KRA4ER	8	12	27	16	16	680
5011964	5/16"	KRA5ER	10	13	29	17	19	680
5012431	3/8"	KRA6ER	10	13	29	19	19	680
5012498	1/2"	KRA8ER	13	13	36	27	27	680
5011613	5/8"	KRA10ER	16	17	41	32	31	680
5012071	3/4"	KRA12ER	16	19	45	33	32	680
5011697	7/8"	KRA14ER	21	21	52	41	39	680
5012161	1"	KRA16ER	20	22	54	46	42	500
5012202	1-1/4"	KRA20ER	24	29	62	50	48	500
5011831	1-1/2"	KRA24ER	27	36	74	60	54	500
5012272	2"	KRA32ER	38	49	100	80	77	500

Supplied By

Primary Fluid Power Limited
Caddick Road
Knowsley Business Park
L34 9HP
Tel No. +44(0)151 632 9500
Fax No. +44(0)151 548 9896
www.PrimaryFP.co.uk