




EWVD-S Adjustable Male Stud Elbow

Features:

- Two edge cutting ring.
- Cone stop limit to prevent over tightening.
- 6mm to 42mm OD tube sizes in (L) light and (S) heavy series.
- Best cutting ring pressure performance.

Benefits:

- Reliable first time assembly.
- High sealing efficiency for cutting ring technology.
- High nominal pressure L Series - up to 600 bar S Series - up to 800 bar.
- Available in stainless steel body & nut on request * WalproX stainless ring now available.

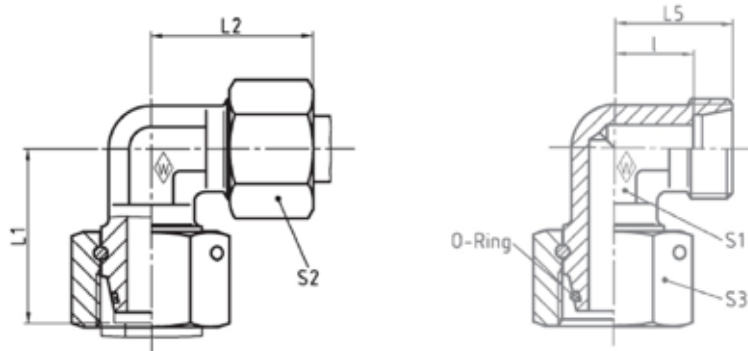

Primary Item No	Tube O/D	Part No	L1 mm	L2 mm	L5 mm	l mm	S1 A/F mm	S2 A/F mm	S3 A/F mm	O'Ring	Max WP Bar
5070434	6	P-EWVD6S	27	31	23	16	12	17	17	4,5x1,5	800
5070436	8	P-EWVD8S	27,5	32	24	17	14	19	19	6x1,5	800
5070424	10	P-EWVD10S	30	34	25	17,5	17	22	22	8,5x1,5	800
5070425	12	P-EWVD12S	31	38	29	21,5	17	24	24	10x1,5	630
5070427	16	P-EWVD16S	36,5	43	33	24,5	24	30	30	14x2	630
5070428	20	P-EWVD20S	44,5	48	37	26,5	27	36	36	17,3x2,4	420
5070429	25	P-EWVD25S	50	54	42	30	36	46	46	22,3x2,4	420
5070430	30	P-EWVD30S	55	62	49	35,5	41	50	50	27,3x2,4	400
5070432	38	P-EWVD38S	63	72	57	41	50	60	60	35x2,5	400