




## EWVD-L Adjustable Male Stud Elbow

### Benefits

- Reliable first time assembly.
- High sealing efficiency for cutting ring technology.
- High nominal pressure L Series - up to 600 bar S Series - up to 800 bar.
- Available in stainless steel body & nut on request \* WalproX stainless ring now available.

### Features

- Two edge cutting ring.
- Cone stop limit to prevent over tightening.
- 6mm to 42mm OD tube sizes in (L) light and (S) heavy series.
- Best cutting ring pressure performance.

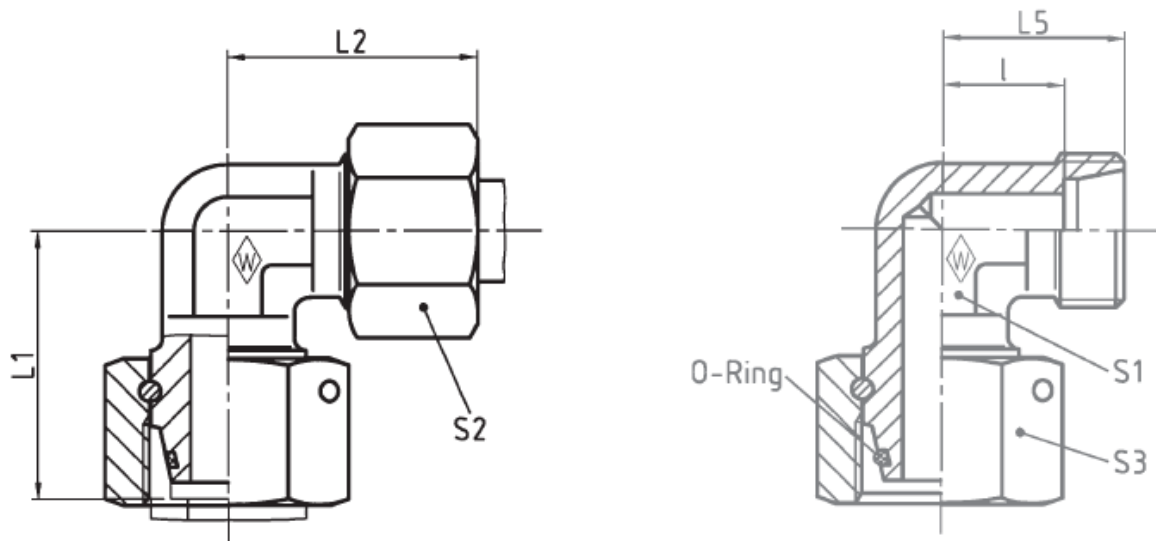

Primary Item No	Tube O/D	Part No	L <sub>1</sub> mm	L <sub>2</sub> mm	L <sub>5</sub> mm	I mm	S <sub>1</sub> A/F mm	S <sub>2</sub> A/F mm	S <sub>3</sub> A/F mm	O'Ring	Max WP Bar
5070433	6	P-EWVD6L	26	29	21	14	12	14	17	4,5x1,5	500
5070435	8	P-EWVD8L	27,5	29	21	14	12	17	17	6x1,5	500
5070423	10	P-EWVD10L	29	30	22	15	14	19	19	8,5x1,5	500
5070426	12	P-EWVD12L	29,5	32	24	17	17	22	22	10x1,5	400
5070907	15	P-EWVD15L	32,5	36	28	21	19	27	27	12x2	400
5070908	18	P-EWVD18L	35,5	40	31	23,5	24	32	32	15x2	400
5070909	22	P-EWVD22L	38,5	44	35	27,5	27	36	36	20x2	250
5070910	28	P-EWVD28L	41,5	47	38	30,5	36	41	46	26x2	250
5070431	35	P-EWVD35L	51	56	45	34,5	41	50	50	32x2,5	250
5070911	42	P-EWVD42L	56	63	51	40	50	60	60	38x2,5	250

**Supplied By**  
Primary Fluid Power Limited  
Caddick Road  
Knowsley Business Park  
L34 9HP  
Tel No. +44(0)151 632 9500  
Fax No. +44(0)151 548 9896  
[www.PrimaryFP.co.uk](http://www.PrimaryFP.co.uk)