




## WV-L Equal Elbow

### Benefits

- Reliable first time assembly.
- High sealing efficiency for cutting ring technology.
- High nominal pressure L Series - up to 600 bar S Series - up to 800 bar.
- Available in stainless steel body & nut on request \* WalproX stainless ring now available.

### Features

- Two edge cutting ring.
- Cone stop limit to prevent over tightening.
- 6mm to 42mm OD tube sizes in (L) light and (S) heavy series.
- Best cutting ring pressure performance.

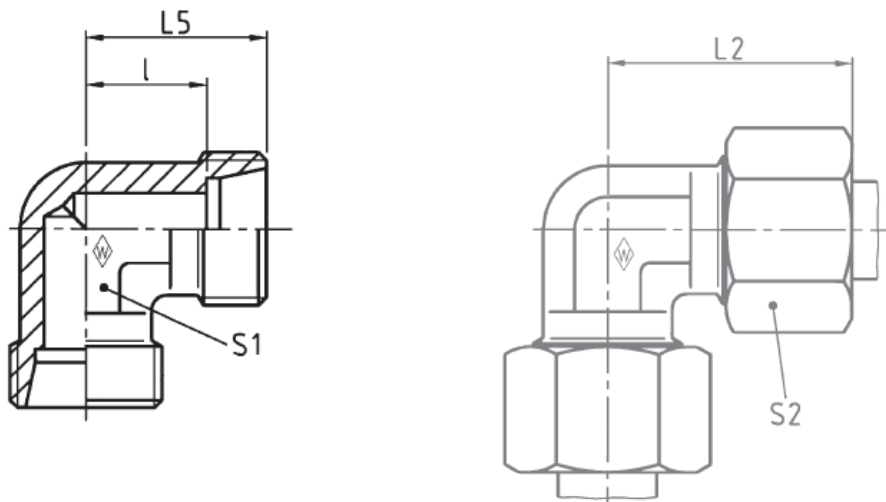

Primary Item No	Tube O/D	Part No	L <sub>2</sub> mm	L <sub>5</sub> mm	L mm	S <sub>1</sub> A/F mm	S <sub>2</sub> A/F mm	Max WP Bar
5070387	6	P-WV6L	27	19	12	12	14	500
5070389	8	P-WV8L	29	21	14	12	17	500
5070371	10	P-WV10L	30	22	15	14	19	500
5070373	12	P-WV12L	32	24	17	17	22	400
5070376	15	P-WV15L	36	28	21	19	27	400
5070378	18	P-WV18L	40	31	23,5	24	32	400
5070380	22	P-WV22L	44	35	27,5	27	36	250
5070382	28	P-WV28L	47	38	30,5	36	41	250
5070384	35	P-WV35L	56	45	34,5	41	50	250
5070386	42	P-WV42L	63	51	40	50	60	250

**Supplied By**  
Primary Fluid Power Limited  
Caddick Road  
Knowsley Business Park  
L34 9HP  
Tel No. +44(0)151 632 9500  
Fax No. +44(0)151 548 9896  
[www.PrimaryFP.co.uk](http://www.PrimaryFP.co.uk)