




EH-MS Tube Insert

Benefits

- Reliable first time assembly.
- High sealing efficiency for cutting ring technology.
- High nominal pressure L Series - up to 600 bar S Series - up to 800 bar.
- Available in stainless steel body & nut on request * WalproX stainless ring now available.

Features

- Two edge cutting ring.
- Cone stop limit to prevent over tightening.
- 6mm to 42mm OD tube sizes in (L) light and (S) heavy series.
- Best cutting ring pressure performance.

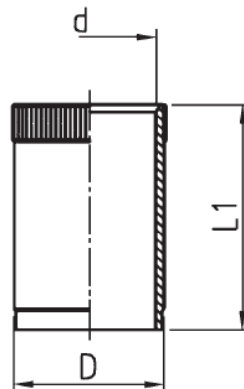

Primary Item No	Tube I/D	Part No	D mm	d mm	L1 mm
5070206	4	EH4MS	3,8	2,5	17
5070207	9	EH9MS	8,8	7,5	17
5070204	10	EH10MS	9,8	8,5	17
5070562	12	EH12MS	11,8	10,5	17
5070205	13	EH13MS	12,8	11,5	18

Supplied By

Primary Fluid Power Limited
Caddick Road
Knowsley Business Park
L34 9HP
Tel No. +44(0)151 632 9500
Fax No. +44(0)151 548 9896
www.PrimaryFP.co.uk