



CLOGGING INDICATORS Differential



Recommended tightening torque 90 Nm

SERIES 5E - 5F



Series 5E & 5F:
differential visual indicator,
set 500 kPa (5 bar) - 5E
& 800 kPa (8 bar) - 5F +/-10%



SERIES 6E - 6F & SERIES 7E - 7F

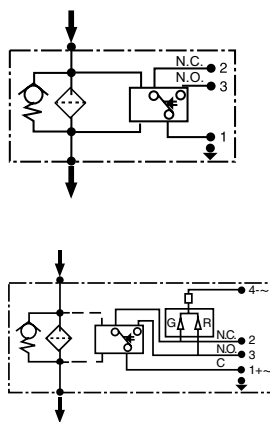

Series 6E & 6F (series 7E & 7F with LED - 24V):
differential electrical indicator,
set 500 kPa (5 bar) - 6E
& 800 kPa (8 bar) - 6F +/-10%.

Connector according to DIN 43650.
Protection IP65 according to DIN 40050.
SPDT: C.A. 125-250 V
> max resistive or inductive load 1A;
C.C. 14-30 V
> max resistive or inductive load 4-3 A resp.

SERIES T2 - T3



Series T2 & T3:
differential electrical indicator
with thermostat 30°C,
set 500 kPa (5 bar) - T2 &
800 kPa (8 bar) - T3 +/-10%.

Connector according to DIN 43650.
Protection IP65 according to DIN 40050.
SPDT: C.A. 125-250 V
> max resistive or inductive load 1A;
C.C. 14-30 V
> max resistive or inductive load 4-3 A resp.

SERIES 72 - 73 AVAILABLE ONLY ON REQUEST - SEE SUMMING UP OF THE CLOGGING INDICATORS

FILTER ELEMENT

	A	B	C	kg media F+ & C+	kg media H+	Area (cm ²)		
						Media F+	Media H+	Media C+
EPB11	45	25	85	0,15	0,25	355	340	310
EPB12	45	25	116	0,20	0,55	500	475	435
EPB13	45	25	211	0,30	0,45	935	915	815
EPB21	52	23,5	115	0,25	0,40	975	975	780
EPB22	52	23,5	210	0,35	0,55	1.830	1.785	1.465
EPB31	78	42,5	118	0,40	0,70	2.000	1.470	1.720
EPB32	78	42,5	210	0,80	1,30	3.695	2.695	3.170
EPB33	78	42,5	330	1,00	1,60	5.025	4.325	4.025
EPB34	78	42,5	430	1,20	1,80	6.585	5.685	6.585

