




GEV-SR FOA Male Stud Coupling

Features:

- Two edge cutting ring.
- Cone stop limit to prevent over tightening.
- 6mm to 42mm OD tube sizes in (L) light and (S) heavy series.
- Best cutting ring pressure performance.

Benefits:

- Reliable first time assembly.
- High sealing efficiency for cutting ring technology.
- High nominal pressure L Series - up to 600 bar S Series - up to 800 bar.
- Available in stainless steel body & nut on request * WalproX stainless ring now available.

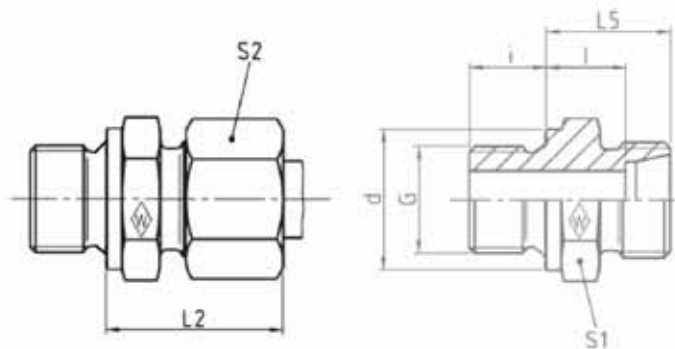

| Primary Item No | Tube O/D | Thread BSP | Part No | L2 mm | L5 mm | l mm | i mm | d mm | S1 A/F mm | S2 A/F mm | Max WP Bar |
|-----------------|----------|------------|-------------------|-------|-------|------|------|------|-----------|-----------|------------|
| 5071927 | 6 | 1/4" | P-GEV6SRFOA | 28 | 20 | 13 | 12 | 18 | 19 | 17 | 630 |
| 5071932 | 8 | 1/4" | P-GEV8SRFOA | 30 | 22 | 15 | 12 | 18 | 19 | 19 | 630 |
| 5071893 | 10 | 1/4" | P-GEV10SR-1/4FOA | 30,5 | 22 | 14,5 | 12 | 18 | 19 | 22 | 630 |
| 5071894 | 10 | 3/8" | P-GEV10SRFOA | 31 | 22,5 | 15 | 12 | 22 | 22 | 22 | 630 |
| 5071892 | 10 | 1/2" | P-GEV10SR-1/2FOA | 33,5 | 25 | 17,5 | 14 | 26 | 27 | 22 | 630 |
| 5071899 | 12 | 1/4" | P-GEV12SR-1/4FOA | 32,5 | 24 | 16,5 | 12 | 18 | 22 | 24 | 630 |
| 5071900 | 12 | 3/8" | P-GEV12SRFOA | 33 | 24,5 | 17 | 12 | 22 | 22 | 24 | 630 |
| 5071898 | 12 | 1/2" | P-GEV12SR-1/2FOA | 34 | 25 | 17,5 | 14 | 26 | 27 | 24 | 630 |
| 5071904 | 16 | 3/8" | P-GEV16SR-3/8FOA | 36,5 | 26 | 18 | 12 | 22 | 27 | 30 | 630 |
| 5071905 | 16 | 1/2" | P-GEV16SRFOA | 37 | 27 | 18,5 | 14 | 26 | 27 | 30 | 630 |
| 5071908 | 20 | 1/2" | P-GEV20SR-1/2FOA | 40 | 31 | 18,5 | 14 | 26 | 32 | 36 | 400 |
| 5071909 | 20 | 3/4" | P-GEV20SRFOA | 42 | 31 | 20,5 | 16 | 32 | 32 | 36 | 400 |
| 5071912 | 25 | 3/4" | P-GEV25SR-3/4FOA | 47 | 35 | 23 | 16 | 32 | 41 | 46 | 400 |
| 5071913 | 25 | 1" | P-GEV25SRFOA | 47 | 35 | 23 | 18 | 39 | 41 | 46 | 400 |
| 5071916 | 30 | 1" | P-GEV30SR-1FOA | 50 | 37 | 23,5 | 18 | 39 | 50 | 50 | 250 |
| 5071918 | 30 | 1-1/4" | P-GEV30SRFOA | 50 | 37 | 23,5 | 20 | 49 | 50 | 50 | 250 |
| 5071920 | 38 | 1-1/4" | P-GEV38SR-11/4FOA | 57 | 42 | 26 | 20 | 49 | 55 | 60 | 250 |
| 5071921 | 38 | 1-1/2" | P-GEV38SRFOA | 57 | 42 | 26 | 22 | 55 | 55 | 60 | 250 |