




TV-L Equal Tee

Benefits

- Reliable first time assembly.
- High sealing efficiency for cutting ring technology.
- High nominal pressure L Series - up to 600 bar S Series - up to 800 bar.
- Available in stainless steel body & nut on request * WalproX stainless ring now available.

Features

- Two edge cutting ring.
- Cone stop limit to prevent over tightening.
- 6mm to 42mm OD tube sizes in (L) light and (S) heavy series.
- Best cutting ring pressure performance.

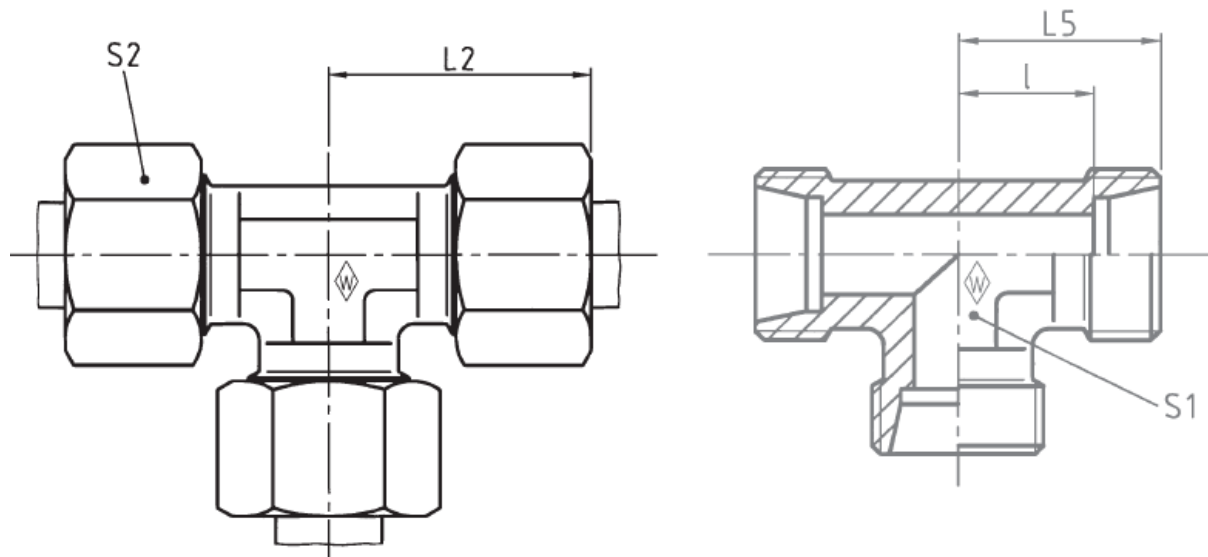

| Primary Item No | Tube O/D | Part No | L2 mm | L5 mm | l mm | S1 A/F mm | S2 A/F mm | Max WP Bar |
|-----------------|----------|---------|-------|-------|------|-----------|-----------|------------|
| 5070367 | 6 | P-TV6L | 27 | 19 | 12 | 12 | 14 | 500 |
| 5070369 | 8 | P-TV8L | 29 | 21 | 14 | 12 | 17 | 500 |
| 5070352 | 10 | P-TV10L | 30 | 22 | 15 | 14 | 19 | 500 |
| 5070354 | 12 | P-TV12L | 32 | 24 | 17 | 17 | 22 | 400 |
| 5070356 | 15 | P-TV15L | 36 | 28 | 21 | 19 | 27 | 400 |
| 5070358 | 18 | P-TV18L | 40 | 31 | 23,5 | 24 | 32 | 400 |
| 5070360 | 22 | P-TV22L | 44 | 35 | 27,5 | 27 | 36 | 250 |
| 5070362 | 28 | P-TV28L | 47 | 38 | 30,5 | 36 | 41 | 250 |
| 5070364 | 35 | P-TV35L | 56 | 45 | 34,5 | 41 | 50 | 250 |
| 5070366 | 42 | P-TV42L | 63 | 51 | 40 | 50 | 60 | 250 |

Supplied By
Primary Fluid Power Limited
Caddick Road
Knowsley Business Park
L34 9HP
Tel No. +44(0)151 632 9500
Fax No. +44(0)151 548 9896
www.PrimaryFP.co.uk